




# DUNE™ Second Look®

## Scored Tegular

fine texture



UP TO **51%** RECYCLED CONTENT


**LEED®**



Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)  
\*LOCATION DEPENDENT



Items  
2711  
2712  
2722

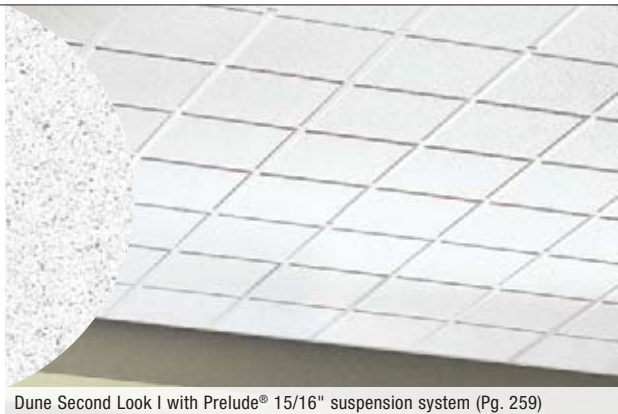

Dune Second Look I with Prelude® 15/16" suspension system (Pg. 259)

### KEY SELECTION ATTRIBUTES

- Geometric scored visuals
- Upgrade look at modest price
- 100% Biobased content (see page 331)
- Durable – Scratch-resistant
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

### TYPICAL APPLICATIONS

- Specialty shops/stores
- Corridors
- Offices

### COLOR



White

### VISUAL SELECTION

### PERFORMANCE

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 273-277 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	Acoustics		Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content*	Recycle Program	Warranty*
				NRC	CAC									
<b>DUNE Second Look I</b>														
15/16" Angled Tegular	11	<b>2711</b>	24 x 48 x 3/4"	0.50	35	Class A	0.83	•	•	•	•	High	•	30
<b>DUNE Second Look II</b>														
15/16" Angled Tegular	11	<b>2712</b>	24 x 48 x 3/4"	0.50	35	Class A	0.83	•	•	•	•	High	•	30
9/16" Angled Tegular	27	<b>2722</b>	24 x 48 x 3/4"	0.50	35	Class A	0.83	•	•	•	•	High	•	30

### FACE VIEW



1. Second Look I – Scoring creates nominal 12" x 12" squares
2. Second Look II – Scoring creates nominal 24" x 24" squares

### DETAIL



1. Dune Second Look
2. Dune Second Look with Suprafine® 9/16" suspension system

### SUSPENSION SYSTEMS



### PHYSICAL DATA

#### Material

Wet-formed mineral fiber

#### Surface Finish

Factory-applied latex paint

#### Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

#### ASTM E1264 Classification

Type III, Form 2, Pattern C E K  
Fire Class A

#### Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.



#### Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

#### VOC Emissions

Third party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

#### Insulation Value

R Factor – 1.6 (BTU units)  
R Factor – 0.28 (Watts units)

#### High Recycled Content\*

Contains greater than 50% total recycled content. Total recycled content based on product composition

of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

#### Design Consideration

Do not mix Dune Second Look with standard Dune panels in the same room

#### 30-Year Performance Guarantee & Warranty\*

When installed with Armstrong Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

#### Weight; Square Feet/Carton

1.00 lbs/SF; 80 SF/ctn

#### Minimum Order Quantity

1 carton

#### Metric Items Available

2711M, 2722M, 2712M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine™ / 1 877 ARMSTRONG  
[armstrong.com/commceilings](http://armstrong.com/commceilings)  
(search: dune)  
BPCS-3223-813

LEED® is a registered trademark of the U.S. Green Building Council  
All other trademarks used herein are the property of AWI Licensing Company and/or its affiliates © 2013 AWI Licensing Company  
Printed in the United States of America

