

ASPEN Panels/
DORN DX/DXL Suspension System

Features and Benefits

- Random, naturally sculptured appearance offers upscale look without upscale cost.
- Sizes and performance meet most design criteria.
- Suitable for general applications.
- USDA Certified Biobased Product!


Applications

- Schools
- General offices
- Retail stores

Substrate

- Water-felted mineral fiber

See LEED report tool at usgdesignstudio.com for detailed sustainability information.

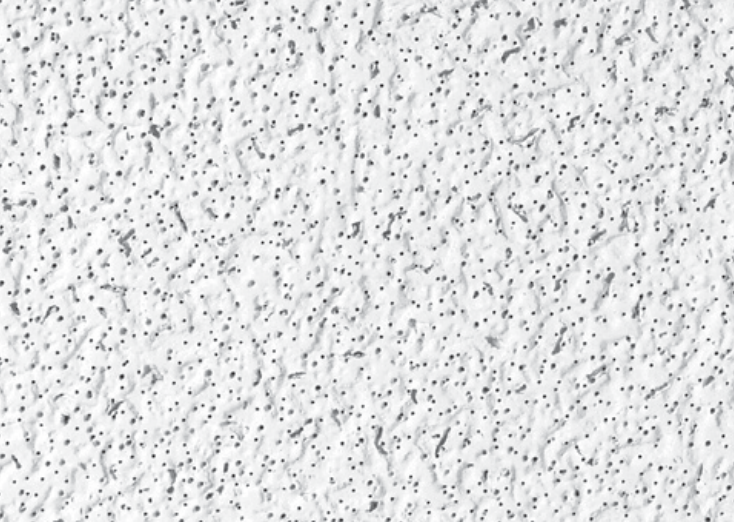







Medium-Textured Panel

To order samples, go to usg.com



Flat White
050

UL Classified												
Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost	
		🔥		🔊		💡		⊕	👉	♻️	💰	
ASPEN™ Panels	SLT 	2'x2' x3/4"	Class A	650	.55	35	.87 💡	White	A	Low	41%	\$\$
		2'x4' x3/4"	Class A	651	.55	35	.87 💡	White	A	Low	41%	\$\$
ASPEN ILLUSION™ Two/24 Panels The look of 2'x2' panels	SLT ³ 	2'x4' x3/4"	Class A	652	.55	35	.84	White	A	Low	41%	\$\$
ILLUSION Two/24												
Face-Cut Patterns												
Legend												
<p> Low Emissions (VOC)  ≥ .85 LR</p> <p>Low-emitting performance meets CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on the CHPS database for low-emitting materials. USG Certificate of Compliance for Low VOC Emissions also available on usg.com.</p>												
A DX®/DXL™												
Grid Profile Options												

**Physical Data/
Footnotes**

Product literature
Data sheet: SC1809

ASTM E1264 classification
Aspen: Type III, Form 2, Pattern CDFI
Aspen ILLUSION: Type III, Form 2, Pattern CDFIK

ASTM E84 surface burning characteristics
Class A
Flame spread: 25
Smoke developed: 50

Weight
1.43 lbs./sq. ft. (Class A)
1.67 lbs./sq. ft. (ILLUSION)

Thermal resistance
R-1.7 (3/4" panels)

Maximum backloading
See USG 30-Year Limited Warranty Commercial Applications SC2102.

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Recommended suspensions
See the Grid and Edge selector.

Notes
1. For details see LEED Report Tool at usgdesignstudio.com.
2. LR values are shown as averages.
3. Panels have a 15/16" routing.
4. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.