



PEBBLED Panels with *CLIMAPLUS* Superior Performance/  
DONN DX/DXL Suspension System

#### LEED Credits

Recycled Content: 34%  
*CLIMAPLUS* Superior Performance for Mold and mildew

MR				EQ		
Waste Reduction <sup>1</sup>	Recycled Content	Regional Materials <sup>2</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

#### Features and Benefits


- Economical, medium-textured ceiling panel has upscale appearance.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a *DONN*® brand suspension system.

#### Applications

- Schools
- Corridors
- General offices
- Retail stores

#### Substrate

- Water-felted mineral fiber

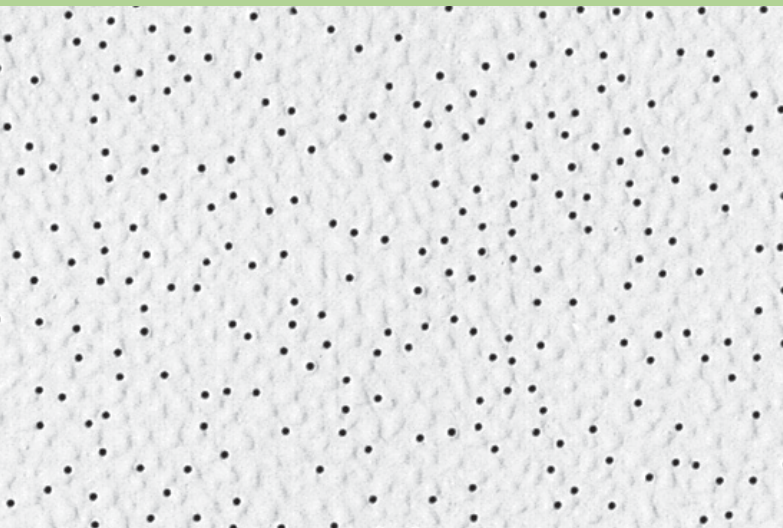

Medium-textured panel

Call 888 874.2450 for samples



White

**30**

Year System Warranty  
 – No visible sag  
 – Mold/mildew protection

PEBBLED  
 CLIMAPlus Panels

UL Classified												
Edge	Panel Size	Class	Item No.	NRC	CAC Min.	LR <sup>3</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content <sup>4</sup>	Panel Cost
SQ 	2' x2' x5/8"	Class A	4801	.55	35	.86	White	A, B, C	Low		34%	\$
	2' x4' x5/8"	Class A	4800	.55	35	.86	White	A, B	Low		34%	\$
SLT 	2' x2' x5/8"	Class A	4805	.55	35	.86	White	D	Low		34%	\$
FLB 	2' x2' x5/8"	Class A	4867	.55	35	.86	White	E, F, G, H	Low		34%	\$

**Legend**

**Low Emissions (VOC Class)**

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

**CLIMAPlus Superior Performance<sup>5</sup>**

Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mold and mildew.

**Grid Profile Options**

A	B	C	D	E	F	G	H
DX <sup>®</sup> /DXL™	DXW™	CENTRICITEE™ DXT	DX/DXL	CENTRICITEE DXT	FINELINE <sup>®</sup> DXF	FINELINE <sup>®</sup> 1/8 DXFF	IDENTITEE™ DXI™

**Physical Data/ Footnotes**

**Product literature**  
 Data sheet: SC1836

**ASTM E1264 classification**  
 Type III, Form 2, Pattern CE

**ASTM E84 surface burning characteristics**  
 Class A

Flame spread: 25  
 Smoke developed: 50

**Weight**  
 .70-.79 lb./sq. ft.

**Thermal resistance**  
 R-1.4

**Maximum backloading**  
 See Warranty for details.

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

**Footnotes**

1. Applies when USG acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. LR values are shown as averages.
4. For details, see Sustainability selector.
5. Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew.

For details, see *Ceiling Systems Limited Warranty Commercial Applications* (SC2102) and *CLIMAPlus Ceilings Certification of Performance* (SC2451).

